


Keilriemenscheiben für Taper-Buchsen, Profil SPA-1

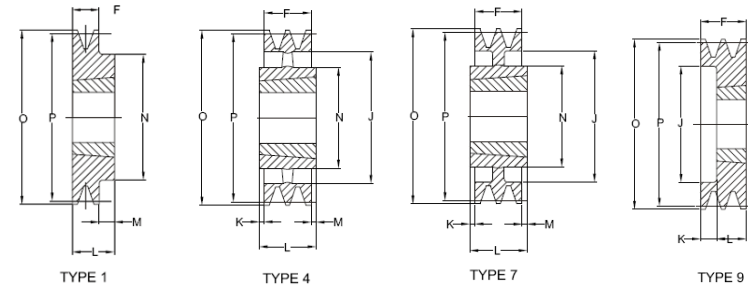

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPA 63-01	1	63.0	68.5	9	1108	28	-	40	38	18	22	-	-
SPA 67-01	1	67.0	72.5	1	1108	28	-	20	38	-	22	2	62
SPA 71-01	1	71.0	76.5	1	1108	28	-	20	-	-	22	2	62
SPA 75-01	1	75.0	80.5	1	1108	28	-	20	-	-	22	2	62
SPA 80-01	1	80.0	85.5	1	1210	32	-	20	-	-	25	5	75
SPA 85-01	1	85.0	90.5	1	1210	32	-	20	-	-	25	5	75
SPA 90-01	1	90.0	96.5	1	1210	32	-	20	-	-	25	5	75
SPA 95-01	1	95.0	100.5	1	1210	32	-	20	-	-	25	5	75
SPA 100-01	1	100.0	105.5	1	1610	42	-	20	-	-	25	5	80
SPA 106-01	1	106.0	111.5	1	1610	42	-	20	-	-	25	5	80
SPA 112-01	1	112.0	117.5	1	1610	42	-	20	-	-	25	5	80
SPA 118-01	1	118.0	123.5	1	1610	42	-	20	-	-	25	5	80
SPA 125-01	1	125.0	130.5	1	1610	42	-	20	-	-	25	5	80
SPA 132-01	1	132.0	137.5	1	1610	42	-	20	-	-	25	5	80
SPA 140-01	1	140.0	145.5	1	1610	42	-	20	-	-	25	5	80
SPA 150-01	1	150.0	155.5	1	1610	42	-	20	-	-	25	5	80
SPA 160-01	1	160.0	165.5	1	1610	42	-	20	-	-	25	5	80
SPA 170-01	1	170.0	175.5	1	1610	42	-	20	-	-	25	5	80
SPA 180-01	1	180.0	185.5	1	1610	42	-	20	-	-	25	5	80
SPA 190-01	1	190.0	195.5	1	1610	42	-	20	-	-	25	5	80
SPA 200-01	1	200.0	205.5	7	2012	50	10	20	165	-	32	12	100
SPA 224-01	1	224.0	229.5	7	2012	50	10	20	189	-	32	12	100
SPA 250-01	1	250.0	255.5	7	2012	50	10	20	215	6	32	6	100
SPA 280-01	1	280.0	285.5	7	2012	50	10	20	245	-	32	12	100
SPA 315-01	1	315.0	320.5	4	2012	50	-	20	280	-	32	12	100
SPA 355-01	1	355.0	360.5	4	2012	50	-	20	320	-	32	12	100
SPA 400-01	1	400.0	405.5	4	2012	50	-	20	365	-	32	12	100
SPA 450-01	1	450.0	455.5	4	2012	50	-	20	415	-	32	12	100
SPA 500-01	1	500.0	505.5	4	2517	60	-	20	465	-	45	25	120
SPA 630-01	1	630.0	635.5	4	2517	60	-	20	595	-	45	25	120