


Keilriemenscheiben für Taper-Buchsen, Profil SPA-5

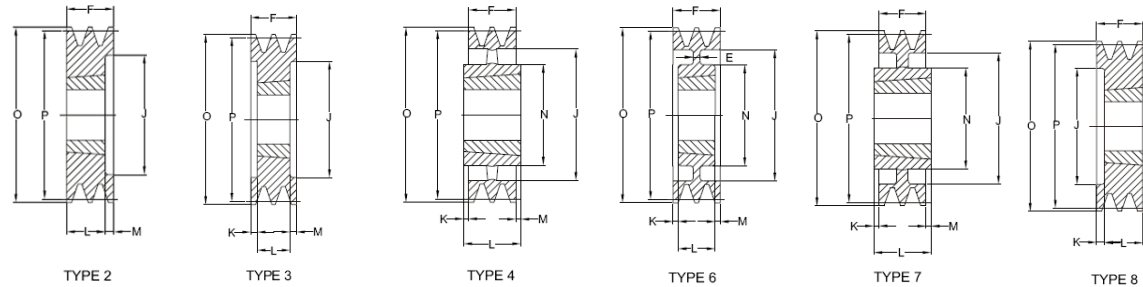

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPA 100-05	5	100.0	105.5	2	1615	42	-	80	70	-	38	42	-
SPA 106-05	5	106.0	111.5	8	2012	50	-	80	76	48	32	-	-
SPA 112-05	5	112.0	117.5	8	2012	50	-	80	80	48	32	-	-
SPA 118-05	5	118.0	123.5	2	2012	50	-	80	86	-	32	48	-
SPA 125-05	5	125.0	130.5	3	2012	50	-	80	92	24	32	24	-
SPA 132-05	5	132.0	137.5	3	2517	60	-	80	98	17.5	45	17.5	-
SPA 140-05	5	140.0	145.5	2	2517	60	-	80	106	17.5	45	17.5	-
SPA 160-05	5	160.0	165.5	7	2517	60	-	80	126	17.5	45	17.5	-
SPA 180-05	5	180.0	185.5	7	3020	75	-	80	146	14.5	51	14.5	-
SPA 200-05	5	200.0	205.5	3	3020	75	-	80	165	14.5	51	14.5	-
SPA 224-05	5	224.0	229.5	2	3020	75	-	80	189	-	51	29	-
SPA 250-05	5	250.0	255.5	6	3020	75	10	80	215	14.5	51	14.5	150
SPA 280-05	5	280.0	285.5	7	3535	90	10	80	245	4.5	89	4.5	170
SPA 315-05	5	315.0	320.5	7	3353	90	12	80	280	4.5	89	4.5	170
SPA 355-05	5	355.0	360.5	4	3535	90	-	80	320	4.5	89	4.5	170
SPA 400-05	5	400.0	405.5	4	3535	90	-	80	365	4.5	89	4.5	170
SPA 450-05	5	450.0	455.5	4	3535	90	-	80	415	4.5	89	4.5	170
SPA 500-05	5	500.0	505.5	4	3535	90	-	80	465	4.5	89	4.5	170
SPA 560-05	5	560.0	565.5	4	3535	90	-	80	525	4.5	89	4.5	170
SPA 630-05	5	630.0	635.5	4	3535	90	-	80	595	4.5	89	4.5	170
SPA 800-05	5	800.0	805.5	4	4040	100	-	80	765	11	102	11	216
SPA 1000-05	5	1000.0	1005.5	4	4545	110	-	80	965	17	114	17	225