


## Keilriemenscheiben für Taper-Buchsen, Profil SPB-3

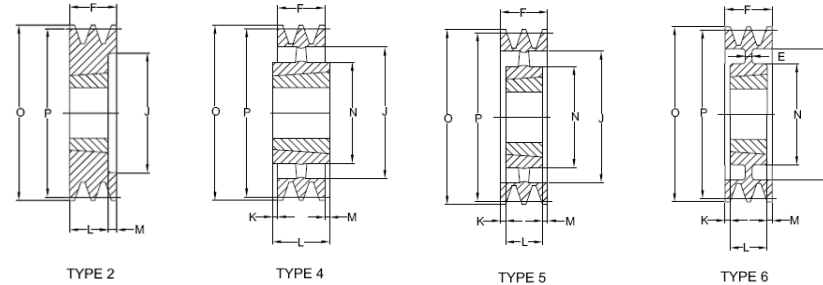

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPB 100-03	3	100.0	107.0	2	1610	42	-	63	57	-	25	38	-
SPB 112-03	3	112.0	119.0	2	1610	42	-	63	72	-	25	38	-
SPB 118-03	3	118.0	125.0	2	1610	42	-	63	78	-	25	38	-
SPB 125-03	3	125.0	132.0	2	2012	50	-	63	82	-	32	31	-
SPB 132-03	3	132.0	139.0	2	2012	50	-	63	89	-	32	31	-
SPB 140-03	3	140.0	147.0	2	2012	50	-	63	97	-	32	31	-
SPB 150-03	3	150.0	157.0	2	2517	60	-	63	107	-	45	18	-
SPB 160-03	3	160.0	167.0	2	2517	60	-	63	117	-	45	18	-
SPB 170-03	3	170.0	177.0	2	2517	60	-	63	127	-	45	18	-
SPB 180-03	3	180.0	187.0	2	2517	60	-	63	137	-	45	18	-
SPB 190-03	3	190.0	197.0	2	2517	60	-	63	147	-	45	18	-
SPB 200-03	3	200.0	207.0	2	2517	60	-	63	157	-	45	18	-
SPB 212-03	3	212.0	219.0	6	2517	60	12	63	169	-	45	18	120
SPB 224-03	3	224.0	231.0	6	2517	60	12	63	181	-	45	18	120
SPB 236-03	3	236.0	243.0	6	2517	60	10	63	193	-	45	18	120
SPB 250-03	3	250.0	257.0	6	3020	75	12	63	207	-	51	12	150
SPB 280-03	3	280.0	287.0	6	3020	75	13	63	237	6	51	6	150
SPB 300-03	3	300.0	307.0	6	3020	75	13	63	257	6	51	6	150
SPB 315-03	3	315.0	322.0	6	3020	75	13	63	272	6	51	6	150
SPB 335-03	3	335.0	342.0	6	3020	75	13	63	292	6	51	6	150
SPB 355-03	3	355.0	362.0	5	3020	75	-	63	312	6	51	6	150
SPB 400-03	3	400.0	407.0	4	3535	90	-	63	357	13	89	13	170
SPB 450-03	3	450.0	457.0	4	3535	90	-	63	407	-	89	26	170
SPB 500-03	3	500.0	507.0	4	3535	90	-	63	457	-	89	26	170
SPB 560-03	3	560.0	567.0	4	3535	90	-	63	517	-	89	26	170
SPB 630-03	3	630.0	637.0	4	3535	90	-	63	587	-	89	26	170
SPB 710-03	3	710.0	717.0	4	3535	90	-	63	664	4	89	22	170
SPB 800-03	3	800.0	807.0	4	3535	90	-	63	754	4	89	22	170
SPB 900-03	3	900.0	907.0	4	3535	90	-	63	854	4	89	22	170
SPB 1000-03	3	1000.0	1007.0	4	4040	100	-	63	954	6	102	33	200
SPB 1250-03	3	1250.0	1257.0	4	4040	100	-	63	1204	6	102	33	200