


Keilriemenscheiben für Taper-Buchsen, Profil SPB-5

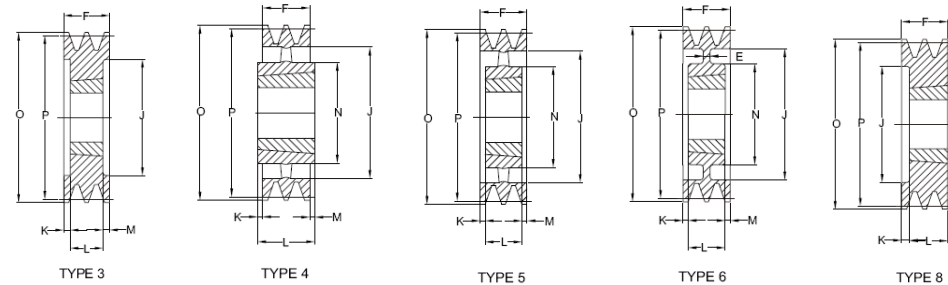

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPB 125-05	5	125.0	132.0	8	2012	50	-	101	82	69	32	-	-
SPB 132-05	5	132.0	139.0	8	2517	60	-	101	89	56	45	-	-
SPB 140-05	5	140.0	147.0	3	2517	60	-	101	97	28	45	28	-
SPB 150-05	5	150.0	157.0	3	2517	60	-	101	107	28	45	28	-
SPB 160-05	5	160.0	167.0	3	2517	60	-	101	117	28	45	28	-
SPB 170-05	5	170.0	177.0	3	3020	75	-	101	127	25	51	25	-
SPB 180-05	5	180.0	187.0	3	3020	75	-	101	137	25	51	25	-
SPB 190-05	5	190.0	197.0	3	3020	75	-	101	147	25	51	25	-
SPB 200-05	5	200.0	207.0	3	3020	75	-	101	157	25	51	25	-
SPB 212-05	5	212.0	219.0	3	3020	75	-	101	169	25	51	25	-
SPB 224-05	5	224.0	231.0	3	3020	75	-	101	181	25	51	25	-
SPB 236-05	5	236.0	243.0	3	3535	90	-	101	193	6	89	6	-
SPB 250-05	5	250.0	257.0	3	3535	90	-	101	207	6	89	6	170
SPB 280-05	5	280.0	287.0	6	3535	90	18	101	237	6	89	6	170
SPB 300-05	5	300.0	307.0	6	3535	90	18	101	257	6	89	6	170
SPB 315-05	5	315.0	322.0	6	3535	90	18	101	272	6	89	6	170
SPB 335-05	5	335.0	342.0	6	3535	90	16	101	292	6	89	6	170
SPB 355-05	5	355.0	362.0	5	3535	90	-	101	312	6	89	6	170
SPB 400-05	5	400.0	407.0	6	3535	90	-	101	357	6	89	6	170
SPB 450-05	5	450.0	457.0	6	3535	90	-	101	407	6	89	12	170
SPB 500-05	5	500.0	507.0	5	3535	90	-	101	457	-	89	12	170
SPB 560-05	5	560.0	567.0	4	4040	100	-	101	517	-	102	1	200
SPB 630-05	5	630.0	637.0	4	4040	100	-	101	587	-	102	1	200
SPB 710-05	5	710.0	717.0	4	4040	100	-	101	664	0.5	102	0.5	200
SPB 800-05	5	800.0	807.0	4	4040	100	-	101	754	0.5	102	0.5	200
SPB 900-05	5	900.0	907.0	4	4545	110	-	101	854	6.5	114	6.5	225
SPB 1000-05	5	1000.0	1007.0	4	4545	110	-	101	954	6.5	114	6.5	225
SPB 1250-05	5	1250.0	1257.0	4	4545	110	-	101	1204	6.5	114	6.5	225