


Keilriemenscheiben für Taper-Buchsen, Profil SPB-6

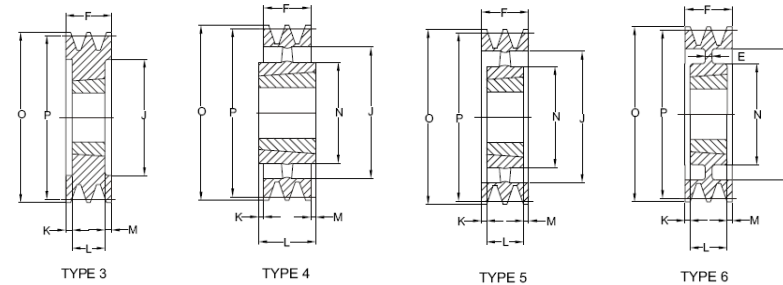

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPB 140-06	6	140.0	147.0	3	2517	60	-	120	97	37.5	45	37.5	-
SPB 150-06	6	150.0	157.0	3	2517	60	-	120	107	37.5	45	37.5	-
SPB 160-06	6	170.0	167.0	3	3020	75	-	120	117	34.5	51	34.5	-
SPB 170-06	6	180.0	177.0	3	3020	75	-	120	127	34.5	51	34.5	-
SPB 180-06	6	180.0	187.0	3	3020	75	-	120	137	34.5	51	34.5	-
SPB 190-06	6	190.0	197.0	3	3020	75	-	120	147	34.5	51	34.5	-
SPB 200-06	6	200.0	207.0	3	3020	75	-	120	157	34.5	51	34.5	-
SPB 212-06	6	212.0	219.0	3	3535	90	-	120	169	15.5	89	15.5	-
SPB 224-06	6	224.0	231.0	3	3535	90	-	120	181	15.5	89	15.5	-
SPB 236-06	6	236.0	243.0	3	3535	90	-	120	193	15.5	89	15.5	-
SPB 250-06	6	250.0	257.0	3	3535	90	-	120	207	15.5	89	15.5	-
SPB 280-06	6	280.0	287.0	6	3535	90	18	120	237	15.5	89	15.5	170
SPB 300-06	6	300.0	307.0	6	3535	90	18	120	257	15.5	89	15.5	170
SPB 315-06	6	315.0	322.0	6	3535	90	18	120	272	15.5	89	15.5	170
SPB 335-06	6	355.0	342.0	6	3535	90	18	120	292	15.5	89	15.5	170
SPB 355-06	6	355.0	362.0	6	3535	90	18	120	312	15.5	89	15.5	170
SPB 400-06	6	400.0	407.0	5	3535	90	-	120	357	15.5	89	15.5	170
SPB 450-06	6	450.0	457.0	5	4040	100	-	120	407	-	102	18	200
SPB 500-06	6	500.0	507.0	5	4040	100	-	120	457	-	102	18	200
SPB 560-06	6	560.0	567.0	5	4040	100	-	120	517	-	102	18	200
SPB 630-06	6	630.0	637.0	5	4040	100	-	120	587	-	102	18	200
SPB 710-06	6	710.0	717.0	5	4040	100	-	120	664	9	102	9	216
SPB 800-06	6	800.0	807.0	5	4545	110	-	120	754	3	114	3	225
SPB 900-06	6	900.0	907.0	5	4545	110	-	120	854	3	114	3	225
SPB 1000-06	6	1000.0	1007.0	5	4545	110	-	120	954	3	114	3	225
SPB 1250-06	6	1250.0	1257.0	4	5050	125	-	120	1204	3.5	127	3.5	245