


## Keilriemenscheiben für Taper-Buchsen, Profil SPB-8

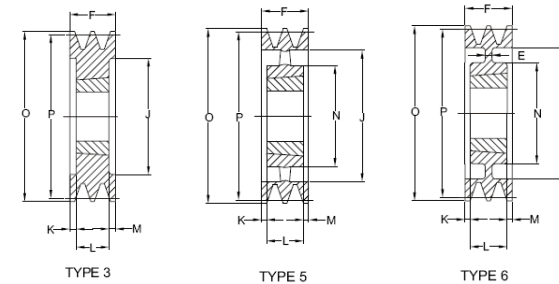

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPB 160-08	8	160.0	167.0	3	3020	75	-	158	117	53.5	51	53.5	-
SPB 170-08	8	170.0	177.0	3	3030	75	-	158	127	41	76	41	-
SPB 180-08	8	180.0	187.0	3	3030	75	-	158	137	41	76	41	-
SPB 190-08	8	190.0	197.0	3	3030	75	-	158	147	41	76	41	-
SPB 200-08	8	200.0	207.0	3	3535	90	-	158	157	34.5	89	34.5	-
SPB 212-08	8	212.0	219.0	3	3535	90	-	158	169	34.5	89	34.5	-
SPB 224-08	8	224.0	231.0	3	3535	90	-	158	181	34.5	89	34.5	-
SPB 236-08	8	236.0	243.0	3	3535	90	-	158	193	34.5	89	34.5	-
SPB 250-08	8	250.0	257.0	3	3535	90	-	158	207	34.5	89	34.5	-
SPB 280-08	8	280.0	287.0	3	3535	90	-	158	237	34.5	89	34.5	-
SPB 300-08	8	300.0	307.0	6	3535	90	20	158	257	34.5	89	34.5	170
SPB 315-08	8	315.0	322.0	6	3535	90	18	158	272	34.5	89	34.5	170
SPB 335-08	8	335.0	342.0	6	3535	90	18	158	292	34.5	89	34.5	170
SPB 355-08	8	355.0	362.0	6	3535	90	18	158	312	34.5	89	34.5	170
SPB 400-08	8	400.0	407.0	5	4040	100	-	158	357	28	102	28	200
SPB 450-08	8	450.0	457.0	5	4040	100	-	158	407	28	102	28	200
SPB 500-08	8	500.0	507.0	5	4040	100	-	158	457	28	102	28	200
SPB 560-08	8	560.0	567.0	5	4545	110	-	158	517	22	114	22	225
SPB 630-08	8	630.0	637.0	5	4545	110	-	158	587	22	114	22	225
SPB 710-08	8	710.0	717.0	5	4545	110	-	158	664	22	114	22	225
SPB 800-08	8	800.0	807.0	5	4545	110	-	158	754	22	114	22	225
SPB 900-08	8	900.0	907.0	5	4545	110	-	158	854	22	114	22	225
SPB 1000-08	8	1000.0	1007.0	5	5050	125	-	158	954	15.5	127	15.5	245
SPB 1250-08	8	1250.0	1257.0	5	5050	125	-	158	1204	15.5	127	15.5	245