


## Keilriemenscheiben für Taper-Buchsen, Profil SPC-6

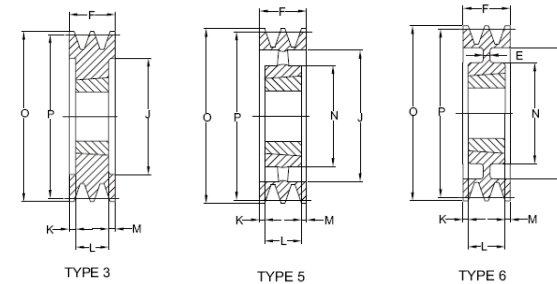

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPC 200-06	6	200.0	209.6	3	3535	90	-	162	148	36.5	89	36.5	-
SPC 212-06	6	212.0	221.6	3	3535	90	-	162	160	36.5	89	36.5	-
SPC 224-06	6	224.0	233.6	3	3535	90	-	162	173	36.5	89	36.5	-
SPC 236-06	6	236.0	245.6	3	3535	90	-	162	185	36.5	89	36.5	-
SPC 250-06	6	250.0	259.6	3	3535	90	-	162	198	36.5	89	36.5	-
SPC 265-06	6	265.0	274.6	3	3535	90	-	162	213	36.5	89	36.5	-
SPC 280-06	6	280.0	289.6	3	3535	90	-	162	228	36.5	89	36.5	-
SPC 300-06	6	300.0	309.6	6	3535	90	20	162	247	36.5	89	36.5	170
SPC 315-06	6	315.0	324.6	6	3535	90	20	162	264	36.5	89	36.5	170
SPC 335-06	6	335.0	344.6	6	3535	90	20	162	280	36.5	89	36.5	170
SPC 355-06	6	355.0	364.6	6	3535	90	20	162	304	36.5	89	36.5	170
SPC 375-06	6	375.0	384.6	6	4040	100	20	162	324	30	102	30	200
SPC 400-06	6	400.0	409.6	6	4040	100	20	162	348	30	102	30	200
SPC 425-06	6	425.0	434.6	6	4545	110	30	162	369	24	114	24	225
SPC 450-06	6	450.0	459.6	6	4545	110	30	162	394	24	114	24	225
SPC 475-06	6	475.0	484.6	6	4545	110	30	162	419	24	114	24	225
SPC 500-06	6	500.0	509.6	5	4545	110	30	162	444	24	114	24	225
SPC 530-06	6	530.0	539.6	5	4545	110	30	162	474	24	114	24	225
SPC 560-06	6	560.0	569.6	5	5050	125	-	162	504	17.5	127	17.5	245
SPC 630-06	6	630.0	639.6	5	5050	125	-	162	574	17.5	127	17.5	245
SPC 710-06	6	710.0	719.6	5	5050	125	-	162	656	17.5	127	17.5	245
SPC 800-06	6	800.0	809.6	5	5050	125	-	162	737	17.5	127	17.5	245
SPC 1000-06	6	1000.0	1009.6	5	5050	125	-	162	937	17.5	127	17.5	245
SPC 1250-06	6	1250.0	1259.6	5	5050	125	-	162	1187	17.5	127	17.5	245