


Keilriemenscheiben für Taper-Buchsen, Profil SPZ-5

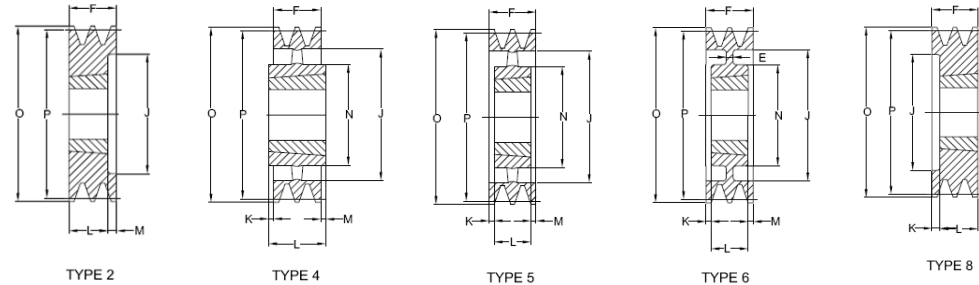

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPZ 85-5	5	85.0	89.0	8	1610	42	-	64	60	39	25	-	-
SPZ 90-5	5	90.0	94.0	8	1610	42	-	64	61	39	25	-	-
SPZ 95-5	5	95.0	99.0	8	1610	42	-	64	66	39	25	-	-
SPZ 100-5	5	100.0	104.0	8	2012	50	-	64	72	32	32	-	-
SPZ 106-5	5	106.0	110.0	8	2012	50	-	64	78	32	32	-	-
SPZ 112-5	5	112.0	116.0	8	2012	50	-	64	84	32	32	-	-
SPZ 118-5	5	118.0	122.0	8	2012	50	-	64	90	32	32	-	-
SPZ 125-5	5	125.0	129.0	8	2012	50	-	64	97	32	32	-	-
SPZ 132-5	5	132.0	136.0	8	2517	60	-	64	104	19	45	-	-
SPZ 140-5	5	140.0	144.0	2	2517	60	-	64	112	-	45	19	-
SPZ 150-5	5	150.0	154.0	2	2517	60	-	64	122	-	45	19	-
SPZ 160-5	5	160.0	164.0	2	2517	60	-	64	132	-	45	19	-
SPZ 170-5	5	170.0	174.0	2	2517	60	-	64	141	-	45	19	-
SPZ 180-5	5	180.0	184.0	2	2517	60	-	64	152	-	45	19	-
SPZ 190-5	5	190.0	194.0	6	2517	60	10	64	161	9.5	45	9.5	120
SPZ 200-5	5	200.0	204.0	6	2517	60	10	64	172	9.5	45	9.5	120
SPZ 224-5	5	224.0	228.0	6	2517	60	10	64	196	9.5	45	9.5	120
SPZ 250-5	5	250.0	254.0	5	2517	60	-	64	222	9.5	45	9.5	120
SPZ 280-5	5	280.0	284.0	5	2517	60	-	64	252	9.5	45	9.5	120
SPZ 315-5	5	315.0	319.0	5	2517	60	-	64	287	9.5	45	9.5	120
SPZ 355-5	5	355.0	359.0	5	2517	60	-	64	326	9.5	45	9.5	120
SPZ 400-5	5	400.0	404.0	5	3020	75	-	64	371	6.5	51	6.5	150
SPZ 450-5	5	450.0	454.0	5	3020	75	-	64	421	6.5	51	6.5	150
SPZ 500-5	5	500.0	504.0	4	330	75	-	64	471	6	76	6	150
SPZ 630-5	5	630.0	634.0	4	330	75	-	64	601	6	76	6	150
SPZ 800-5	5	800.0	804.0	4	3535	90	-	64	771	12.5	89	12.5	170