


Keilriemenscheiben für Taper-Buchsen, Profil SPA-2

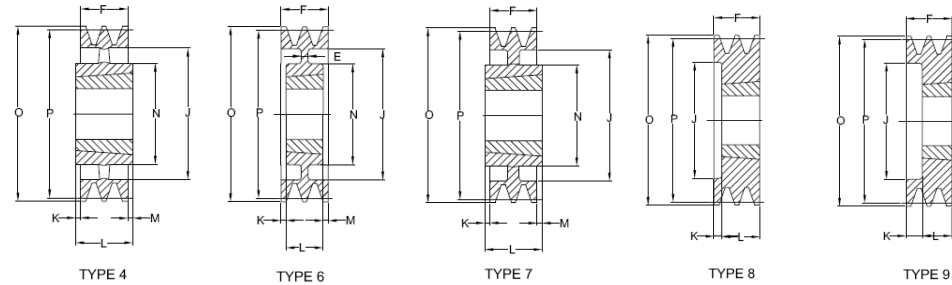

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPA 63-02	2	63.0	68.5	9	1108	28	-	55	36	33	22	-	-
SPA 67-02	2	67.0	72.5	8	1108	28	-	35	37	13	22	-	-
SPA 71-02	2	71.0	76.5	8	1108	28	-	35	40	13	22	-	-
SPA 75-02	2	75.0	80.5	8	1108	28	-	35	44	10	25	-	-
SPA 80-02	2	80.0	85.5	8	1210	32	-	35	47	10	25	-	-
SPA 85-02	2	85.0	90.5	8	1210	32	-	35	50	10	25	-	-
SPA 90-02	2	90.0	95.5	8	1610	42	-	35	60	10	25	-	-
SPA 95-02	2	95.0	100.5	8	1610	42	-	35	64	10	25	-	-
SPA 100-02	2	100.0	105.5	8	1610	42	-	35	70	10	25	-	-
SPA 106-02	2	106.0	111.5	8	1610	42	-	35	76	10	25	-	-
SPA 112-02	2	112.0	117.5	8	1610	42	-	35	80	10	25	-	-
SPA 118-02	2	118.0	123.5	8	1610	42	-	35	86	10	25	-	-
SPA 125-02	2	125.0	130.5	8	1610	42	-	35	90	10	25	-	-
SPA 132-02	2	132.0	137.5	8	2012	50	-	35	98	3	32	-	-
SPA 140-02	2	140.0	145.5	8	2012	50	-	35	106	3	32	-	-
SPA 150-02	2	150.0	155.5	8	2012	50	-	35	116	3	32	-	-
SPA 160-02	2	160.0	165.5	8	2012	50	15	35	125	3	32	-	-
SPA 170-02	2	170.0	175.5	8	2012	50	15	35	135	3	32	-	-
SPA 180-02	2	180.0	185.5	6	2012	50	15	35	148	1.5	32	1.5	100
SPA 190-02	2	190.0	195.5	6	2012	50	15	35	158	1.5	32	1.5	100
SPA 200-02	2	200.0	205.5	7	2517	60	15	35	165	5	45	5	120
SPA 224-02	2	224.0	229.5	7	2517	60	15	35	189	-	45	10	120
SPA 250-02	2	250.0	255.5	7	2517	60	20	35	215	5	45	5	120
SPA 280-02	2	280.0	285.5	7	2517	60	20	35	245	-	45	10	120
SPA 315-02	2	315.0	320.5	4	2517	60	-	35	280	-	45	10	120
SPA 355-02	2	355.0	360.5	4	2517	60	-	35	320	-	45	10	120
SPA 400-02	2	400.0	405.5	4	2517	60	-	35	365	-	45	10	120
SPA 500-02	2	500.0	505.5	4	2517	60	-	35	465	-	45	10	120
SPA 560-02	2	560.0	565.5	4	3020	75	-	35	525	-	51	16	150
SPA 630-02	2	630.0	635.5	4	3020	75	-	35	595	-	51	16	150