


Keilriemenscheiben für Taper-Buchsen, Profil SPA-3

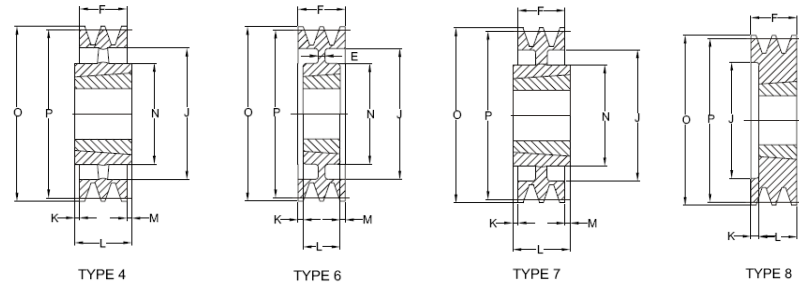

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPA 71-03	3	71.0	76.5	8	1108	28	-	50	40	28	22	-	-
SPA 75-03	3	75.0	80.5	8	1210	32	-	50	44	25	25	-	-
SPA 80-03	3	80.0	85.5	8	1210	32	-	50	47	25	25	-	-
SPA 85-03	3	85.0	90.5	8	1210	32	-	50	50	25	25	-	-
SPA 90-03	3	90.0	95.5	8	1610	42	-	50	60	25	25	-	-
SPA 95-03	3	95.0	100.5	8	1610	42	-	50	64	25	25	-	-
SPA 100-03	3	100.0	105.5	2	1610	42	-	50	70	-	25	25	-
SPA 106-03	3	106.0	111.5	2	1610	42	-	50	76	-	25	25	-
SPA 112-03	3	112.0	117.5	8	2012	50	-	50	83	18	32	-	-
SPA 118-03	3	118.0	123.5	2	2012	50	-	50	86	-	32	18	-
SPA 125-03	3	125.0	128.5	2	2012	50	-	50	92	-	32	18	-
SPA 132-03	3	132.0	137.5	2	2012	50	-	50	98	-	32	18	-
SPA 140-03	3	140.0	145.5	8	2517	60	-	50	106	5	45	-	-
SPA 150-03	3	150.0	155.5	8	2517	60	-	50	116	5	45	-	-
SPA 160-03	3	160.0	165.5	8	2517	60	-	50	126	5	45	-	-
SPA 170-03	3	170.0	175.5	8	2517	60	-	50	138	5	45	-	-
SPA 180-03	3	180.0	185.5	8	2517	60	-	50	146	5	45	-	-
SPA 190-03	3	190.0	195.5	8	2517	60	-	50	158	5	45	-	-
SPA 200-03	3	200.0	205.5	6	2517	60	20	50	165	2.5	45	2.5	120
SPA 224-03	3	224.0	229.5	6	2517	60	20	50	189	2.5	45	2.5	120
SPA 250-03	3	250.0	255.5	6	2517	60	20	50	215	2.5	45	2.5	120
SPA 280-03	3	280.0	285.5	6	2517	60	20	50	245	2.5	45	2.5	120
SPA 315-03	3	315.0	320.5	7	3020	75	25	50	280	0.5	51	0.5	150
SPA 355-03	3	355.0	360.5	4	3020	75	-	50	320	0.5	51	0.5	160
SPA 400-03	3	400.0	405.5	4	3020	75	-	50	365	0.5	51	0.5	150
SPA 450-03	3	450.0	455.5	4	3020	75	-	50	415	0.5	51	0.5	150
SPA 500-03	3	500.0	505.5	4	3020	75	-	50	465	0.5	51	0.5	150
SPA 560-03	3	560.0	565.5	4	3020	75	-	50	525	0.5	51	0.5	150
SPA 630-03	3	630.0	635.5	4	3020	75	-	50	595	0.5	51	0.5	150
SPA 800-03	3	800.0	805.5	4	3535	90	-	50	765	19.5	89	19.5	170
SPA1000-03	3	1000.0	1005.5	4	3535	90	-	50	965	19.5	89	19.5	178