


Keilriemenscheiben für Taper-Buchsen, Profil SPA-4

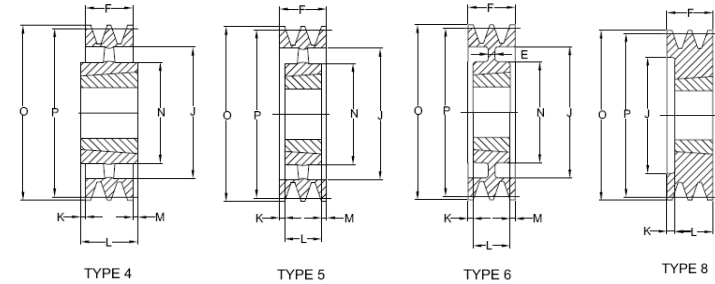

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPA 90-04	4	90.0	95.5	3	1615	42	-	65	64	13.5	38	13.5	-
SPA 95-04	4	95.0	100.5	3	1615	42	-	65	64	13.5	38	13.5	-
SPA 100-04	4	100.0	105.5	2	1615	42	-	65	70	-	38	27	-
SPA 106-04	4	106.0	111.5	8	2012	50	-	65	76	33	32	-	-
SPA 112-04	4	112.0	117.5	8	2012	50	-	65	80	33	32	-	-
SPA 118-04	4	118.0	123.5	2	2012	50	-	65	86	-	32	33	-
SPA 125-04	4	125.0	130.5	2	2012	50	-	65	92	-	32	33	-
SPA 132-04	4	132.0	137.5	2	2517	60	-	65	98	-	45	20	-
SPA 140-04	4	140.0	145.5	2	2517	60	-	65	106	-	45	20	-
SPA 150-04	4	150.0	155.5	2	2517	60	-	65	116	-	45	20	-
SPA 160-04	4	160.0	165.5	2	2517	60	-	65	126	-	45	20	-
SPA 170-04	4	170.0	175.5	2	2517	60	-	65	138	-	45	20	-
SPA 180-04	4	180.0	185.5	2	2517	60	-	65	146	-	45	20	-
SPA 190-04	4	190.0	195.5	2	2517	60	-	65	158	-	45	20	-
SPA 200-04	4	150.0	205.5	2	3020	75	-	65	165	-	51	14	-
SPA 224-04	4	224.0	229.5	2	3020	75	-	65	189	-	51	14	-
SPA 250-04	4	250.0	255.5	6	3020	75	10	65	215	7	51	7	150
SPA 280-04	4	280.0	285.5	6	3020	75	10	65	245	7	51	7	150
SPA 315-04	4	315.0	320.5	6	3020	75	10	65	280	7	51	7	150
SPA 355-04	4	355.0	360.5	5	3020	75	-	65	320	7	51	7	150
SPA 400-04	4	400.0	405.5	5	3020	75	-	65	365	7	51	7	150
SPA 450-04	4	450.0	455.5	5	3020	75	-	65	415	7	51	7	150
SPA 500-04	4	500.0	505.5	5	3020	75	-	65	465	7	51	7	150
SPA 560-04	4	560.0	565.5	4	3535	90	-	65	525	12	89	12	170
SPA 630-04	4	630.0	635.5	4	3535	90	-	65	595	12	89	12	170
SPA 800-04	4	800.0	805.5	4	3535	90	-	65	765	12	89	12	170
SPA 1000-04	4	1000.0	1005.5	4	4040	100	-	65	965	18.5	102	102	216