


Keilriemenscheiben für Taper-Buchsen, Profil SPB-4

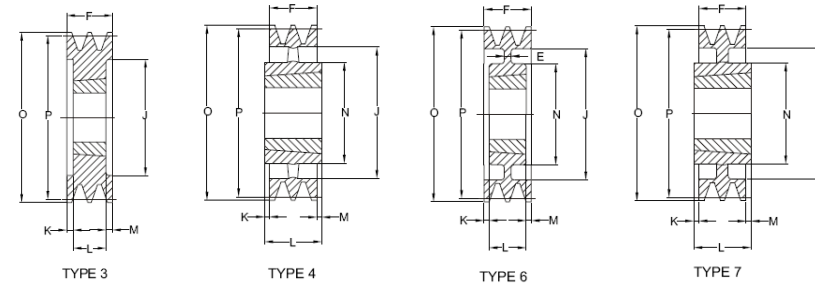

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPB 125-04	4	125.0	132.0	3	2012	50	-	82	82	25	32	25	-
SPB 132-04	4	132.0	139.0	3	2012	50	-	82	89	25	32	25	-
SPB 140-04	4	140.0	147.0	3	2012	60	-	82	97	25	32	25	-
SPB 155-04	4	150.0	157.0	3	2517	60	-	82	107	18.5	45	18.5	-
SPB 160-04	4	160.0	167.0	3	2517	60	-	82	117	18.5	45	18.5	-
SPB 170-04	4	170.0	177.0	3	2517	60	-	82	127	18.5	45	18.5	-
SPB 180-04	4	180.0	187.0	3	2517	60	-	82	137	18.5	45	18.5	-
SPB 190-04	4	190.0	197.0	3	2517	60	-	82	147	18.5	45	18.5	-
SPB 200-04	4	200.0	207.0	3	3020	75	-	82	157	15.5	51	15.5	-
SPB 212-04	4	212.0	219.0	3	3020	75	-	82	169	15.5	51	15.5	-
SPB 224-04	4	224.0	231.0	3	3020	75	-	82	181	15.5	51	15.5	-
SPB 236-04	4	236.0	236.0	3	3020	75	-	82	193	15.5	51	15.5	-
SPB 250-04	4	250.0	257.0	6	3020	75	14	82	207	15.5	51	15.5	150
SPB 280-04	4	280.0	287.0	6	3020	75	16	82	237	15.5	51	15.5	150
SPB 300-04	4	300.0	307.0	6	3020	75	16	82	257	15.5	51	15.5	150
SPB 315-04	4	315.0	322.0	7	3535	90	16	82	272	3.5	89	3.5	170
SPB 335-04	4	335.0	342.0	7	3535	90	16	82	292	3.5	89	3.5	170
SPB 355-04	4	335.0	362.0	7	3535	90	16	82	312	3.5	89	3.5	170
SPB 400-04	4	400.0	407.0	4	3535	90	-	82	357	3.5	89	3.5	170
SPB 450-04	4	450.0	457.0	4	3535	90	-	82	407	-	89	7	170
SPB 500-04	4	500.0	507.0	4	3535	90	-	82	457	-	89	7	170
SPB 560-04	4	560.0	567.0	4	3535	90	-	82	517	-	89	7	170
SPB 630-04	4	630.0	637.0	4	3535	90	-	82	587	-	89	7	170
SPB 710-04	4	710.0	717.0	4	3535	90	-	82	664	3.5	89	3.5	187
SPB 800-04	4	800.0	807.0	4	4040	100	-	82	754	4	102	16	200
SPB 900-04	4	900.0	907.0	4	4040	100	-	82	854	4	102	16	216
SPB 1000-04	4	1000.0	1007.0	4	4040	100	-	82	954	4	102	16	216
SPB 1250-04	4	1250.0	1257.0	4	4545	110	-	82	1204	6	114	26	225