


Keilriemenscheiben für Taper-Buchsen, Profil SPC-3

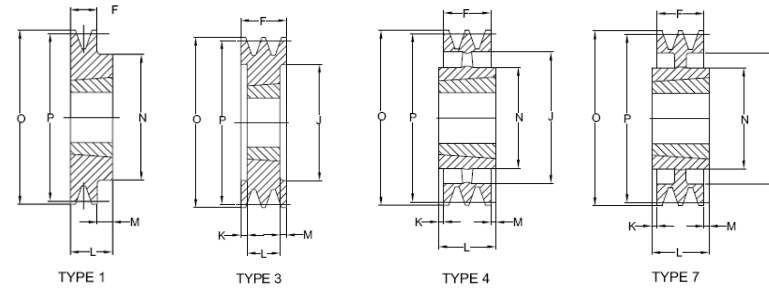

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPC 200-03	3	200.0	209.6	3	2517	60	-	85	150	20	45	20	-
SPC 212-03	3	212.0	221.6	3	3020	75	-	85	162	17	51	17	-
SPC 224-03	3	224.0	233.6	3	3020	75	-	85	173	17	51	17	-
SPC 236-03	3	236.0	245.6	3	3020	75	-	85	185	17	51	17	-
SPC 250-03	3	250.0	259.6	3	3020	75	-	85	200	17	51	17	-
SPC 265-03	3	265.0	274.6	1	3535	90	-	85	209	-	89	4	170
SPC 280-03	3	280.0	289.6	1	3535	90	-	85	224	-	89	4	170
SPC 300-03	3	300.0	309.6	7	3535	90	18	85	249	2	89	2	170
SPC 315-03	3	315.0	324.6	7	3535	90	18	85	264	2	89	2	170
SPC 335-03	3	335.0	345.6	7	3535	90	18	85	284	2	89	2	170
SPC 355-03	3	355.0	365.0	7	3535	90	18	85	304	2	89	2	170
SPC 375-03	3	375.0	384.6	7	3535	90	20	85	324	2	89	2	170
SPC 400-03	3	400.0	409.6	4	3535	90	-	85	344	2	89	2	170
SPC 425-03	3	425.0	434.6	4	3535	90	-	85	369	2	89	2	170
SPC 450-03	3	450.0	459.6	4	3535	90	-	85	394	2	89	2	170
SPC 475-03	3	475.0	484.6	4	3535	90	-	85	419	2	89	2	170
SPC 500-03	3	500.0	509.6	4	3535	90	-	85	444	2	89	2	170
SPC 530-03	3	530.0	539.6	4	3535	90	-	85	474	2	89	2	170
SPC 560-03	3	560.0	569.6	4	3535	90	-	85	504	2	89	2	170
SPC 630-03	3	630.0	639.6	4	4040	100	-	85	574	8.5	102	8.5	200
SPC 800-03	3	800.0	809.6	4	4545	110	-	85	737	4	114	25	225
SPC 1000-03	3	1000.0	1009.6	4	5050	125	-	85	937	8	127	34	245
SPC 1250-03	3	1250.0	1259.6	4	5050	125	-	85	1187	8	127	34	245