


Keilriemenscheiben für Taper-Buchsen, Profil SPC-4

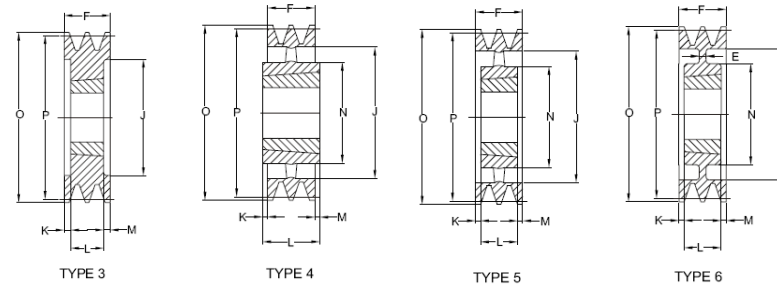

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPC 200-04	4	200.0	209.6	3	3020	75	-	111	144	30	51	30	-
SPC 212-04	4	212.0	221.6	3	3020	75	-	111	156	30	51	30	-
SPC 224-04	4	224.0	233.6	3	3535	90	-	111	168	11	89	11	-
SPC 236-04	4	236.0	245.6	3	3535	90	-	111	180	11	89	11	-
SPC 250-04	4	250.0	259.6	3	3535	90	-	111	194	11	89	11	-
SPC 265-04	4	265.0	274.6	3	3535	90	-	111	209	11	89	11	-
SPC 280-04	4	280.0	289.6	3	3535	90	-	111	224	11	89	11	-
SPC 300-04	4	300.0	309.6	6	3535	90	20	111	244	11	89	11	170
SPC 315-04	4	315.0	324.6	6	3535	90	20	111	259	11	89	11	170
SPC 335-04	4	335.0	344.6	6	3535	90	20	111	279	11	89	11	170
SPC 355-04	4	355.0	365.0	6	3535	90	20	111	279	11	89	11	170
SPC 375-04	4	375.0	384.6	6	3535	90	25	111	319	11	89	11	170
SPC 400-04	4	400.0	409.6	5	3535	90	-	111	344	11	89	11	170
SPC 425-04	4	425.0	434.6	5	3535	90	-	111	369	11	89	11	170
SPC 450-04	4	450.0	459.6	5	3535	90	-	111	394	11	89	11	170
SPC 475-04	4	475.0	484.6	5	3535	90	-	111	419	11	89	11	170
SPC 500-04	4	500.0	509.6	5	3535	90	-	111	444	11	89	11	170
SPC 530-04	4	530.0	539.6	5	3535	90	-	111	474	11	89	11	170
SPC 560-04	4	560.0	569.6	5	4040	100	-	111	504	4.5	102	4.5	200
SPC 630-04	4	630.0	639.6	4	4545	110	-	111	574	1.5	114	1.5	225
SPC 800-04	4	800.0	809.6	4	5050	125	-	111	737	4	127	12	245
SPC 1000-04	4	1000.0	1009.6	4	5050	125	-	111	937	1	127	12	245
SPC 1250-04	4	1250.0	1259.6	4	5050	125	-	111	1187	4	127	12	245