


Keilriemenscheiben für Taper-Buchsen, Profil SPC-5

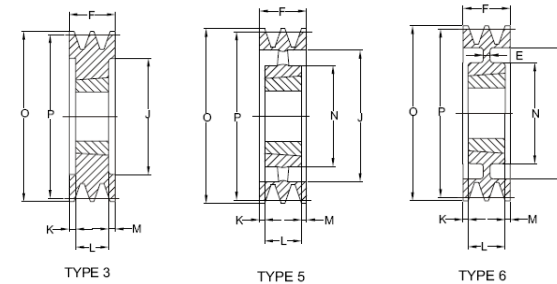

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPC 200-05	5	200.0	209.6	3	3535	90	-	136	150	23.5	89	23.5	-
SPC 212-05	5	212.0	221.6	3	3535	90	-	136	160	23.5	89	23.5	-
SPC 224-05	5	224.0	233.6	3	3535	90	-	136	173	23.5	89	23.5	-
SPC 236-05	5	236.0	245.6	3	3535	90	-	136	185	23.5	89	23.5	-
SPC 250-05	5	250.0	259.6	3	3535	90	-	136	198	23.5	89	23.5	-
SPC 265-05	5	265.0	274.6	3	3535	90	-	136	213	23.5	89	23.5	-
SPC 280-05	5	280.0	289.6	3	3535	90	-	136	228	23.5	89	23.5	-
SPC 300-05	5	300.0	309.6	6	3535	90	20	136	247	23.5	89	23.5	170
SPC 315-05	5	315.0	324.6	6	3535	90	20	136	264	23.5	89	23.5	170
SPC 335-05	5	335.0	344.6	6	3535	90	20	136	280	23.5	89	23.5	170
SPC 355-05	5	355.0	364.6	6	3535	90	20	136	304	23.5	89	23.5	170
SPC 375-05	5	375.0	384.6	6	3535	90	20	136	324	23.5	89	23.5	170
SPC 400-05	5	400.0	409.6	5	3535	90	-	136	344	23.5	89	23.5	170
SPC 425-05	5	425.0	434.6	5	4040	100	-	136	369	17	102	17	200
SPC 450-05	5	450.0	459.6	5	4040	100	-	136	394	17	102	17	200
SPC 475-05	5	475.0	484.6	5	4040	100	-	136	419	17	102	17	200
SPC 500-05	5	500.0	509.6	5	4040	100	-	136	444	17	102	14	200
SPC 530-05	5	530.0	539.6	5	4040	100	-	136	474	17	102	17	200
SPC 560-05	5	560.0	569.6	5	4545	110	-	136	504	11	114	11	225
SPC 630-05	5	630.0	639.6	5	5050	125	-	136	574	4.5	127	4.5	245
SPC 710-05	5	710.0	719.6	5	5050	125	-	136	654	4.5	127	4.5	245
SPC 800-05	5	800.0	809.6	5	5050	125	-	136	737	4.5	127	4.5	245
SPC 1000-05	5	1000.0	1009.6	5	5050	125	-	136	937	4.5	127	4.5	245
SPC 1250-05	5	1250.0	1259.6	5	5050	125	-	136	1187	4.5	127	4.5	245