


Keilriemenscheiben für Taper-Buchsen, Profil SPC-8

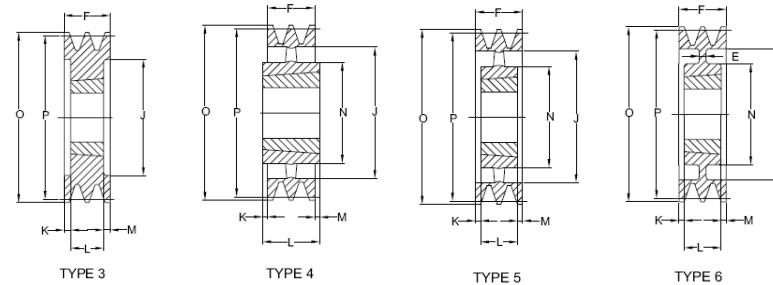

Alle Maße in mm, alle Gewichte in kg

| Bezeichnung | Rillen | Wirk-Ø | Außen-Ø | Type | Buchsen-Nr. | Max. Bohrung | E | F | J | K | L | M | N |
|-------------|--------|--------|---------|------|-------------|--------------|----|-----|------|------|-----|------|-----|
| SPC 200-08 | 8 | 200.0 | 209.6 | 3 | 3535 | 90 | - | 213 | 148 | 62 | 89 | 62 | - |
| SPC 212-08 | 8 | 212.0 | 221.6 | 3 | 3535 | 90 | - | 213 | 160 | 62 | 89 | 62 | - |
| SPC 224-08 | 8 | 224.0 | 233.6 | 3 | 3535 | 90 | - | 213 | 170 | 62 | 89 | 62 | - |
| SPC 236-08 | 8 | 236.0 | 245.6 | 3 | 3535 | 90 | - | 213 | 184 | 62 | 89 | 62 | - |
| SPC 250-08 | 8 | 250.0 | 259.6 | 3 | 3535 | 90 | - | 213 | 198 | 62 | 89 | 62 | - |
| SPC 265-08 | 8 | 265.0 | 274.6 | 3 | 3535 | 90 | - | 213 | 213 | 62 | 89 | 62 | - |
| SPC 280-08 | 8 | 280.0 | 289.6 | 3 | 3535 | 90 | - | 213 | 228 | 62 | 89 | 62 | - |
| SPC 300-08 | 8 | 300.0 | 309.6 | 3 | 4040 | 100 | - | 213 | 247 | 55.5 | 102 | 55.5 | - |
| SPC 315-08 | 8 | 315.0 | 324.6 | 3 | 4040 | 100 | - | 213 | 258 | 55.5 | 102 | 55.5 | - |
| SPC 335-08 | 8 | 335.0 | 344.6 | 6 | 4040 | 100 | - | 213 | 280 | 55.5 | 102 | 55.5 | - |
| SPC 355-08 | 8 | 355.0 | 364.6 | 3 | 4040 | 100 | - | 213 | 304 | 55.5 | 102 | 55.5 | - |
| SPC 375-08 | 8 | 375.0 | 384.6 | 3 | 4545 | 110 | - | 213 | 324 | 49.5 | 114 | 49.5 | - |
| SPC 400-08 | 8 | 400.0 | 409.6 | 6 | 4545 | 110 | 20 | 213 | 348 | 49.5 | 114 | 49.5 | 220 |
| SPC 425-08 | 8 | 425.0 | 434.6 | 6 | 5050 | 125 | 30 | 213 | 369 | 43 | 127 | 43 | 245 |
| SPC 450-08 | 8 | 450.0 | 459.6 | 6 | 5050 | 125 | 30 | 213 | 394 | 43 | 127 | 43 | 245 |
| SPC 475-08 | 8 | 475.0 | 484.6 | 6 | 5050 | 125 | 30 | 213 | 419 | 43 | 127 | 43 | 245 |
| SPC 500-08 | 8 | 500.0 | 509.6 | 6 | 5050 | 125 | 30 | 213 | 444 | 43 | 127 | 43 | 245 |
| SPC 530-08 | 8 | 530.0 | 539.6 | 6 | 5050 | 125 | 30 | 213 | 474 | 43 | 127 | 43 | 245 |
| SPC 560-08 | 8 | 560.0 | 569.6 | 5 | 5050 | 125 | - | 213 | 504 | 43 | 127 | 43 | 245 |
| SPC 630-08 | 8 | 630.0 | 639.6 | 5 | 5050 | 125 | - | 213 | 574 | 43 | 127 | 43 | 245 |
| SPC 710-08 | 8 | 710.0 | 719.6 | 5 | 5050 | 125 | - | 213 | 656 | 43 | 127 | 43 | 245 |
| SPC 800-08 | 8 | 800.0 | 809.6 | 5 | 5050 | 125 | - | 213 | 737 | 43 | 127 | 43 | 245 |
| SPC 1000-08 | 8 | 1000.0 | 1009.6 | 5 | 5050 | 125 | - | 213 | 937 | 43 | 127 | 43 | 245 |
| SPC 1250-08 | 8 | 1250.0 | 1259.6 | 5 | 5050 | 125 | - | 213 | 1187 | 43 | 127 | 43 | 245 |