


## Keilriemenscheiben für Taper-Buchsen, Profil SPZ-1

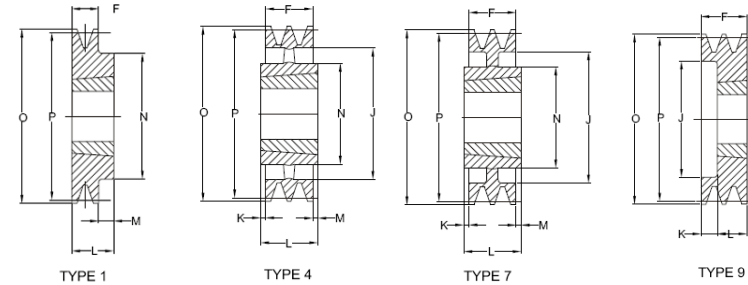

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPZ 50-01	1	50.0	54.0	9	1008	25	-	37	28	15	22	-	-
SPZ 56-01	1	56.0	60.0	9	1008	25	-	37	23	15	22	-	-
SPZ 60-01	1	60.0	64.0	9	1008	25	-	22	-	-	22	-	-
SPZ 63-01	1	63.0	67.0	1	1108	28	-	16	-	-	22	6	62
SPZ 67-01	1	67.0	71.0	1	1108	28	-	16	-	-	22	6	62
SPZ 71-01	1	71.0	75.0	1	1108	28	-	16	-	-	22	6	62
SPZ 75-01	1	75.0	79.0	1	1108	28	-	16	-	-	22	6	62
SPZ 80-01	1	80.0	84.0	1	1210	32	-	16	-	-	25	9	75
SPZ 85-00	1	85.0	89.0	1	1210	32	-	16	-	-	25	9	75
SPZ 90-01	1	90.0	94.0	1	1210	32	-	16	-	-	25	-	75
SPZ 95-01	1	95.0	99.0	1	1210	32	-	16	-	-	25	9	75
SPZ 100-01	1	100.0	104.0	1	1210	32	-	16	-	-	25	9	75
SPZ 106-01	1	106.0	110.0	1	1610	42	-	16	-	-	25	9	80
SPZ 112-01	1	112.0	116.0	1	1610	42	-	16	-	-	25	9	80
SPZ 118-01	1	118.0	112.0	1	1610	42	-	16	-	-	25	9	80
SPZ 125-01	1	125.0	129.0	1	1610	42	-	16	-	-	25	9	80
SPZ 132-01	1	132.0	136.0	1	1610	42	-	16	-	-	25	9	80
SPZ 140-01	1	140.0	146.0	1	1610	42	-	16	-	-	25	9	80
SPZ 150-01	1	150.0	154.0	1	1610	42	-	16	-	-	25	9	80
SPZ 160-01	1	160.0	164.0	1	1610	42	-	16	-	-	25	9	80
SPZ 170-01	1	170.0	174.0	1	1610	42	-	16	-	-	25	9	80
SPZ 180-01	1	180.0	184.0	1	1610	42	-	16	-	-	25	9	80
SPZ 190-01	1	190.0	194.0	7	1610	42	-	16	161	-	25	9	80
SPZ 200-01	1	200.0	204.0	7	2012	50	-	16	172	-	32	16	100
SPZ 224-01	1	224.0	228.0	7	2012	50	15	16	196	-	32	16	100
SPZ 250-01	1	250.0	254.0	4	2012	50	-	16	222	8	32	8	100
SPZ 280-01	1	280.0	284.0	4	2012	50	-	16	252	8	32	8	100
SPZ 315-01	1	315.0	319.0	4	2012	50	-	1	287	8	32	8	100
SPZ 355-01	1	355.0	359.0	4	2012	50	-	16	326	-	8	32	112
SPZ 400-01	1	400.0	404.0	4	2012	50	-	16	371	8	32	8	112
SPZ 450-0	1	450.0	454.0	4	2517	60	-	16	421	14.5	45	14.5	120