


Keilriemenscheiben für Taper-Buchsen, Profil SPZ-2

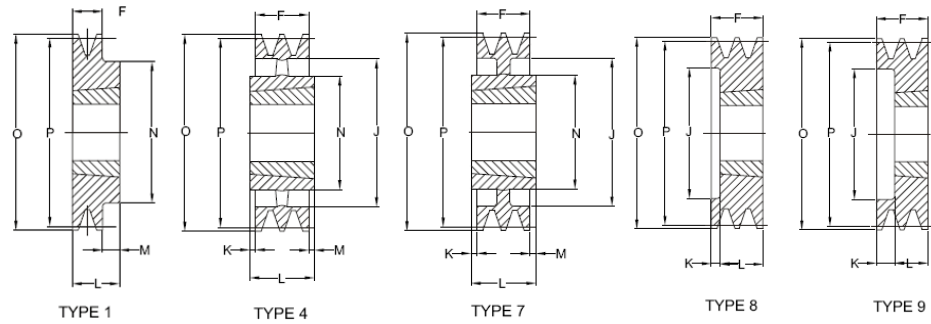

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPZ 50-02	2	50.0	54.0	9	1008	25	-	49	28	27	22	-	-
SPZ 56-02	2	56.0	60.0	9	1108	28	-	49	35	27	22	-	-
SPZ 60-02	2	60.0	64.0	9	1108	28	-	28	28	6	22	-	-
SPZ 63-02	2	63.0	67.0	8	1108	28	-	28	28	6	22	-	-
SPZ 67-02	2	67.0	71.0	8	1108	28	-	28	42	6	22	-	-
SPZ 71-02	2	71.0	75.0	8	1108	28	-	28	42	6	22	-	-
SPZ 75-02	2	75.0	79.0	8	1210	32	-	28	51	3	25	-	-
SPZ 80-02	2	80.0	84.0	8	1210	32	-	28	51	3	25	-	-
SPZ 85-02	2	85.0	89.0	8	1610	32	-	28	60	3	25	-	-
SPZ 90-02	2	90.0	94.0	8	1610	32	-	28	61	3	25	-	-
SPZ 95-02	2	95.0	99.0	8	1610	28	-	28	66	3	22	-	-
SPZ 100-02	2	100.0	104.0	8	1610	42	-	28	71	3	25	-	-
SPZ 106-02	2	106.0	110.0	8	1610	42	-	28	76	3	25	-	-
SPZ 112-02	2	112.0	116.0	8	1610	42	-	28	84	3	25	-	-
SPZ 118-02	2	118.0	122.0	8	1610	42	-	28	90	3	25	-	-
SPZ 125-02	2	125.0	129.0	8	1610	42	-	28	97	3	25	-	-
SPZ 132-02	2	132.0	136.0	8	1610	42	-	28	104	3	25	-	-
SPZ 140-02	2	140.0	146.0	8	1610	42	-	28	112	3	25	-	-
SPZ 150-02	2	150.0	154.0	1	2012	50	-	28	-	-	32	4	100
SPZ 160-02	2	160.0	164.0	1	2012	50	-	28	-	-	32	4	100
SPZ 170-02	2	170.0	174.0	1	2012	50	-	28	-	-	32	4	100
SPZ 180-02	2	180.0	184.0	7	2012	50	10	28	152	-	32	4	100
SPZ 190-02	2	190.0	194.0	7	2012	50	10	28	161	-	32	4	100
SPZ 200-02	2	200.0	204.0	7	2012	50	10	28	171	-	32	4	100
SPZ 224-02	2	224.0	228.0	7	2012	50	10	28	196	-	32	4	100
SPZ 250-02	2	250.0	254.0	4	2012	50	-	28	222	2	32	2	100
SPZ 280-02	2	280.0	284.0	4	2012	50	-	28	252	2	32	2	100
SPZ 315-02	2	315.0	319.0	4	2012	50	-	28	286	2	32	2	100
SPZ 355-02	2	355.0	359.0	4	2012	50	-	28	326	2	32	2	112
SPZ 400-02	2	400.0	404.0	4	2517	50	-	28	371	8.5	45	8.5	120
SPZ4 50-02	2	450.0	454.0	4	2517	60	-	28	421	8.5	45	8.5	120