


## Keilriemenscheiben für Taper-Buchsen, Profil SPZ-3

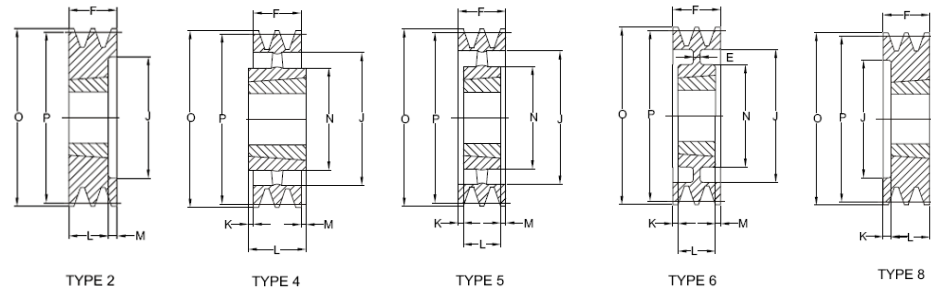

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPZ 63-3	3	63.0	67.0	8	1108	28	-	40	40	18	22	-	-
SPZ 67-3	3	67.0	71.0	8	1108	28	-	40	42	18	22	-	-
SPZ 71-3	3	71.0	75.0	8	1108	28	-	40	42	18	22	-	-
SPZ 75-3	3	75.0	79.0	8	1210	32	-	40	48	15	25	-	-
SPZ 80-3	3	80.0	84.0	8	1210	32	-	40	51	15	25	-	-
SPZ 85-3	3	85.0	89.0	8	1610	42	-	40	60	15	25	-	-
SPZ 90-3	3	90.0	94.0	8	1610	42	-	40	61	15	25	-	-
SPZ 95-3	3	95.0	99.0	8	1610	42	-	40	66	15	25	-	-
SPZ 100-3	3	100.0	104.0	8	1610	42	-	40	71	15	25	-	-
SPZ 106-3	3	106.0	110.0	8	1610	42	-	40	78	15	25	-	-
SPZ 112-3	3	112.0	116.0	8	2012	50	-	40	84	8	32	-	-
SPZ 118-3	3	118.0	122.0	8	2012	50	-	40	92	8	32	-	-
SPZ 125-3	3	125.0	129.0	2	2012	50	-	40	97	-	32	8	-
SPZ 132-3	3	132.0	136.0	2	2012	50	-	40	104	-	32	8	-
SPZ 140-3	3	140.0	144.0	2	2012	50	-	40	112	-	32	8	-
SPZ 150-3	3	150.0	154.0	2	2012	50	-	40	122	-	32	8	-
SPZ 160-3	3	160.0	164.0	2	2012	50	-	40	132	-	32	8	-
SPZ 170-3	3	170.0	174.0	2	2012	50	-	40	141	-	32	8	-
SPZ 180-3	3	180.0	184.0	2	2012	50	-	40	152	-	32	8	-
SPZ 190-3	3	190.0	194.0	6	2012	50	20	40	161	4	32	4	100
SPZ 200-3	3	200.0	204.0	6	2012	50	20	40	172	4	32	4	100
SPZ 224-3	3	224.0	228.0	6	2012	50	20	40	196	4	32	4	100
SPZ 250-3	3	250.0	254.0	5	2012	50	-	40	222	4	32	4	100
SPZ 280-3	3	280.0	284.0	4	2012	50	-	40	252	2.5	45	2.5	120
SPZ 315-3	3	315.0	319.0	4	2012	50	-	40	287	2.5	45	2.5	120
SPZ 355-3	3	355.0	359.0	4	2517	60	-	40	326	2.5	45	2.5	120
SPZ 400-3	3	400.0	404.0	4	2517	60	-	40	371	2.5	45	2.5	120
SPZ 450-3	3	450.0	454.0	4	2517	60	-	40	421	2.5	45	2.5	120
SPZ 500-3	3	500.0	504.0	4	2517	60	-	40	471	2.5	45	2.5	120
SPZ 630-3	3	630.0	634.0	4	2517	60	-	40	601	2.5	45	2.5	120
SPZ 800-3	3	800.0	804.0	4	3020	75	-	40	771	2.5	51	5.5	150