


Keilriemenscheiben für Taper-Buchsen, Profil SPZ-4

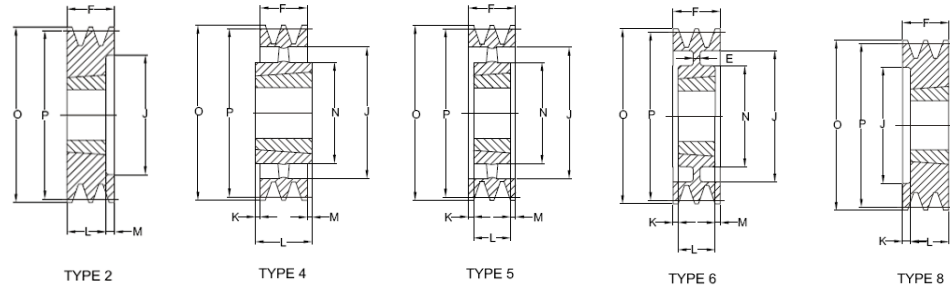

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N	Bezeichnung
SPZ 80-04	4	80.0	84.0	8		1210	32	-	52	51	27	25	-	-
SPZ 85-04	4	85.0	89.0	8		1610	42	-	52	60	27	25	-	-
SPZ 90-04	4	89.0	94.0	8		1610	42	-	52	61	27	25	-	-
SPZ 95-04	4	95.0	99.0	8		1610	42	-	52	66	27	25	-	-
SPZ 100-04	4	100.0	104.0	8		1610	42	-	52	72	27	25	-	-
SPZ 106-04	4	106.0	110.0	8		1610	42	-	52	80	27	25	-	-
SPZ 112-04	4	112.0	116.0	8		2012	50	-	52	86	20	32	-	-
SPZ 118-04	4	118.0	122.0	8		2012	50	-	52	92	20	32	-	-
SPZ 125-04	4	125.0	129.0	2		2012	50	-	52	99	20	32	20	-
SPZ 132-04	4	132.0	136.0	2		2012	50	-	52	104	20	32	20	-
SPZ 140-04	4	140.0	144.0	2		2012	50	-	52	112	7	32	20	-
SPZ 150-04	4	150.0	154.0	2		2517	60	-	52	122	7	45	7	-
SPZ 160-04	4	160.0	164.0	2		2517	60	-	52	132	-	45	7	-
SPZ 170-04	4	170.0	174.0	2		2517	60	-	52	141	-	45	7	-
SPZ 180-04	4	180.0	184.0	2	2517	60	-	52	152	-	45	7	-	-
SPZ 190-04	4	190.0	194.0	6	2517	60	10	52	161	3.5	45	3.5	120	-
SPZ 200-04	4	200.0	204.0	6	2517	60	10	52	172	3.5	45	3.5	120	-
SPZ 224-04	4	224.0	228.0	6	2517	60	10	52	196	3.5	45	3.5	120	-
SPZ 250-04	4	250.0	254.0	5	2517	60	-	52	222	3.5	45	3.5	120	-
SPZ 280-04	4	280.0	284.0	5	2517	60	-	52	252	3.5	45	3.5	120	-
SPZ 315-04	4	315.0	319.0	5	2517	60	-	52	287	3.5	45	3.5	120	-
SPZ 355-04	4	355.0	359.0	5	2517	60	-	52	326	3.5	45	3.5	120	-
SPZ 400-04	4	400.0	404.0	5	2517	60	-	52	371	3.5	45	3.5	120	-
SPZ 450-04	4	450.0	454.0	5	3020	75	-	52	421	0.5	51	0.5	150	-
SPZ 500-04	4	500.0	504.0	5	3020	75	-	52	471	0.5	51	0.5	150	-
SPZ 630-04	4	630.0	634.0	4	330	75	-	52	601	12	76	12	150	-
SPZ 800-04	4	800.0	804.0	4	330	75	-	52	771	12	76	12	150	-