


## Keilriemenscheiben für Taper-Buchsen, Profil SPZ-6

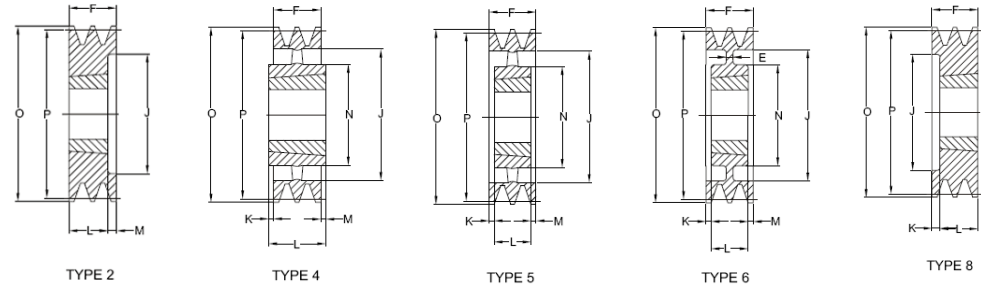

Alle Maße in mm, alle Gewichte in kg

Bezeichnung	Rillen	Wirk-Ø	Außen-Ø	Type	Buchsen-Nr.	Max. Bohrung	E	F	J	K	L	M	N
SPZ 90-06	6	90.0	94.0	8	1610	42	-	76	61	51	25	-	-
SPZ 95-06	6	95.0	99.0	8	1610	42	-	76	66	51	25	-	-
SPZ 100-06	6	100.0	104.0	8	2012	50	-	76	72	44	32	-	-
SPZ 106-06	6	106.0	110.0	8	2012	50	-	76	78	44	32	-	-
SPZ 112-06	6	112.0	116.0	8	2012	50	-	76	84	44	32	-	-
SPZ 118-06	6	118.0	122.0	8	2517	60	-	76	90	31	45	-	-
SPZ 125-06	6	125.0	129.0	8	2517	60	-	76	97	31	45	-	-
SPZ 132-06	6	132.0	136.0	8	2517	60	-	76	104	31	45	-	-
SPZ 140-06	6	140.0	146.0	2	2517	60	-	76	112	-	45	31	-
SPZ 150-06	6	150.0	154.0	2	2517	60	-	76	122	-	45	31	-
SPZ 160-06	6	160.0	164.0	2	2517	60	-	76	132	-	45	31	-
SPZ 170-06	6	170.0	174.0	2	2817	60	-	76	141	-	45	31	-
SPZ 180-06	6	180.0	184.0	2	2517	60	-	76	152	-	45	31	-
SPZ 190-06	6	190.0	194.0	6	2517	60	10	76	161	15	45	15.5	120
SPZ 200-06	6	200.0	204.0	6	2517	60	10	76	172	15	45	15.5	120
SPZ 224-06	6	224.0	228.0	6	2517	60	10	76	196	15.5	45	15.5	120
SPZ 250-06	6	250.0	254.0	5	2517	60	-	76	222	15.5	45	15.5	120
SPZ 280-06	6	280.0	284.0	5	2517	60	-	76	252	15.5	45	15.5	120
SPZ 315-06	6	315.0	319.0	5	2517	60	-	76	287	15.5	45	15.5	120
SPZ 355-06	6	355.0	359.0	5	2517	60	-	76	326	15.5	45	15.5	125
SPZ 400-06	6	400.0	404.0	5	3030	75	-	76	371	-	76	-	150
SPZ 450-06	6	450.0	454.0	5	3030	75	-	76	421	-	76	-	150
SPZ 500-06	6	500.0	504.0	5	3030	75	-	76	471	-	76	-	150
SPZ 630-06	6	630.0	634.0	4	3535	90	-	76	601	06.5	89	06.5	170
SPZ 800-06	6	800.0	804.0	4	3535	90	-	76	771	06.5	89	06.5	170