


Keilriemenscheiben für Taper-Buchsen, Profil SPA-6

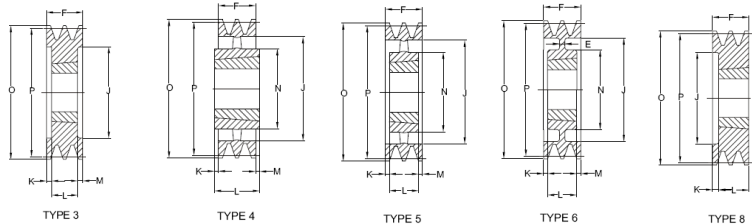

Alle Maße in mm, alle Gewichte in kg

PART NO.	NO.OF GROOVES	P.D	O.D	TYPE	BUSH NO.	MAX BORE	E	F	J	K	L	M	N
SPA 100-06	6	100.0	105.5	3	1615	42	-	95	70	28.5	38	28.5	-
SPA 106-06	6	106.0	111.5	8	2012	50	-	95	76	63	32	-	-
SPA 112-06	6	112.0	117.5	8	2012	50	-	95	80	63	32	-	-
SPA 118-06	6	118.0	123.5	8	2012	50	-	95	86	63	35	-	-
SPA 125-06	6	125.0	130.5	3	2012	50	-	95	92	31.5	32	31.5	-
SPA 132-06	6	132.0	137.5	3	2517	60	-	95	98	25	45	25	-
SPA 140-06	6	140.0	145.5	3	2517	60	-	95	106	25	45	25	-
SPA 150-06	6	150.0	155.5	3	2517	60	-	95	116	25	45	25	-
SPA 160-06	6	160.0	165.5	3	2517	60	-	95	126	25	45	25	-
SPA 180-06	6	180.0	185.5	3	3020	75	-	95	146	22	51	22	-
SPA 200-06	6	200.0	205.5	3	3020	75	-	95	165	22	51	22	-
SPA 224-06	6	224.0	229.5	3	3020	75	-	95	189	22	51	22	-
SPA 250-06	6	250.0	255.5	6	3020	75	20	95	215	22	51	22	150
SPA 280-06	6	280.0	285.5	6	3535	90	25	95	245	3	89	3	170
SPA 315-06	6	315.0	320.5	6	3535	90	25	95	280	3	89	3	170
SPA 355-06	6	355.0	360.5	5	3535	90	-	95	320	3	89	3	170
SPA 400-06	6	400.0	405.5	5	3535	90	-	95	365	3	89	3	170
SPA 450-06	6	450.0	455.5	5	3535	90	-	95	415	3	89	3	170
SPA 500-06	6	500.0	505.5	5	3535	90	-	95	465	3	89	3	170
SPA 560-06	6	560.0	565.5	5	3535	90	-	95	525	3	89	3	170
SPA 630-06	6	630.0	635.5	4	4040	100	-	95	595	03.5	102	03.5	216
SPA 800-06	6	800.0	805.5	4	4040	100	-	95	765	03.5	102	03.5	216
SPA 1000-06	6	1000.0	1005.5	4	4545	110	-	95	965	09.5	114	09.5	225